


# IM200 mobile man anchor



**PROTEKT**<sup>®</sup>

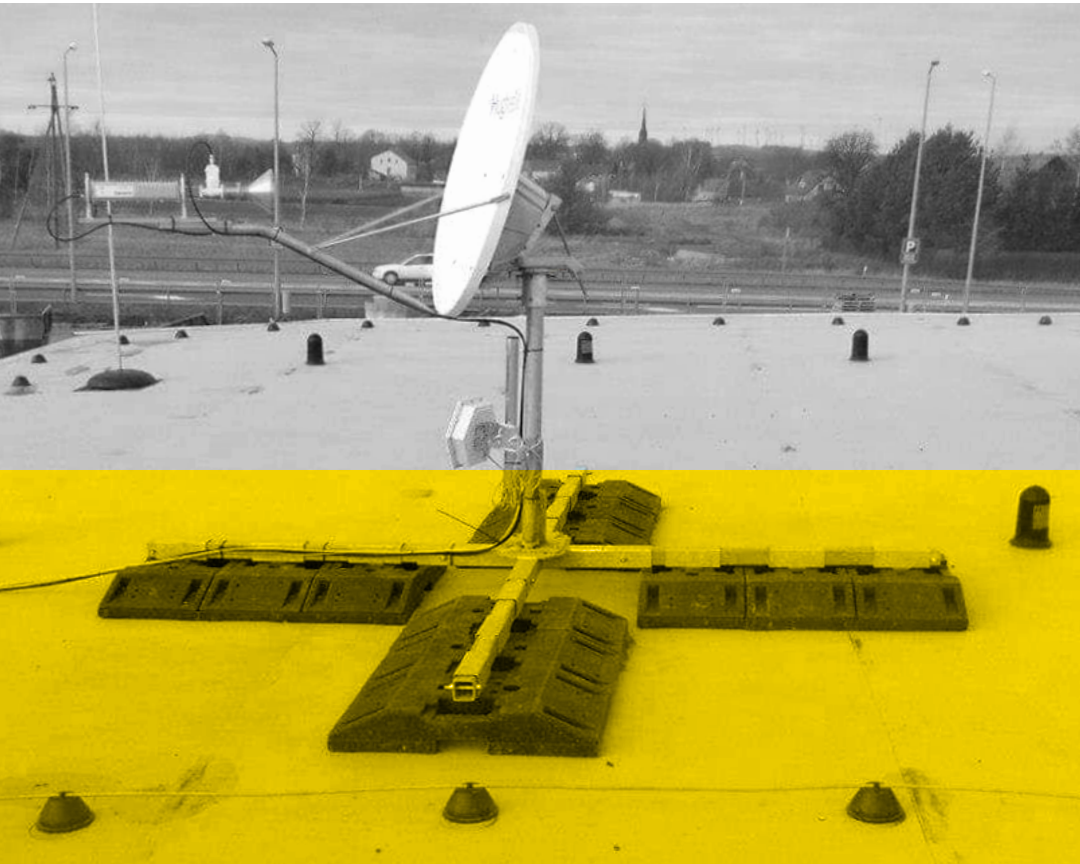

EN 795 type E  
CEN/TS 16415

IM 200 can be used on the following types of surface:

- Bitumen
- PVC membrane

With inclination angle not exceeding 5°

## The IM 200 is portable, collapsible anchorage point

Thanks to its modular design IM 200 allows you to organize a safe workspace without breaking the waterproofing of the roof. After the completion of the planned works the Mobile Man Anchor can be removed. Adequately large surface area taken up by the device can optimally distribute the load over the surface (e.g. a roof) to minimize the impact of the load on the structure.

## IM 200

- Total weight: 367 kg
- Unit weight: 28 kg
- Number of weights: 12 pcs.
- Material:
  - rubber
  - stainless steel
  - hot galvanized steel



**PROTEKT**<sup>®</sup>

OFFICE - Skromna 6, 93-405 Lodz, POLAND / CORRESPONDENCE ADDRESS - PROTEKT, Starorudzka 9, 93-403 Lodz, POLAND  
SALES DEPARTMENT Phone +48 42 29-29-500, export@protekt.com.pl, fax +48 42 680-20-93  
WAREHOUSE - Gombrowicza 6, 93-405 Lodz, POLAND

WWW.PROTEKT.PL